




Almond



Silver Gray



Ixia

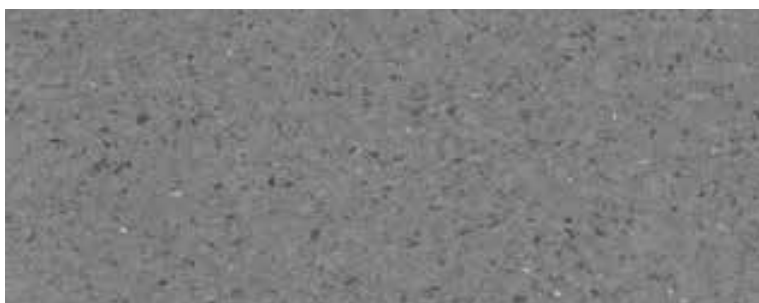

Rock

Medintech Plus



TRUESHIELD Coated Homogeneous Vinyl Sheet

Characteristics	Standard	Unit	Result
Type of floor covering	EN 649		Homogeneous vinyl sheet
Coating			TRUESHIELD
Safety Criteria			
Fire resistance/ Flammability	EN 13501-1	class	B _f -s1
Slip resistance	DIN 51130	group	R9
Dynamic coefficient of friction	EN 13893	class	DS
REACH			Contains no substance mentioned in the SHVC-list
TVOC Emissions	ISO 16000-6		≤ 5 ug/m ³ after 28 days
General Properties			
Roll width	EN 426	m	2
Roll length	EN 426	m	13-20
Overall thickness	EN 428	mm	2.0
Wear layer thickness	EN 429	mm	2.0
Product weight	EN 430	kg/m ²	2.8
Dimensional stability	EN 434		X: < 0.4%; Y: < 0.4%
Flexibility	EN 435		20 mm mandrel, no cracking
Seam strength	EN 684		Mean ≥ 420N/50mm
Residual indentation	EN 433	mm	≤ 0.03
Wear resistance	EN 660-2	group	T
Color fastness	ISO 105-B02	rating	≥ 6
Static electrical propensity	EN 1815	kV	≤ 2.0
Resistance to staining	EN 423		Good resistance
Bacteria resistance	ISO 846: Part C		No observed growth
Classification	EN 685	class	Commercial: 34 very heavy duty Industrial: 43 heavy duty
Additional property			
- Castor chair  - Chemical resistance  - 10 years warranty  - Anti-static  - Anti-Betadine			

www.armstrong-asia.com

